

# ↑ STATIC 11

Low stretch kernmantle rope designed for general use for rope access, work positioning, rescue operations. Suitable also for caving, big wall, hauling and other vertical activities.

## DESCRIPTION

Intended for manipulation with the objects, rescue and rope access methods for work at height.

**Pack:**  
30–80, 100 m

**Spool:**  
100, 200 m

### COLORS

L0250WR white  
L0250RR red  
L0250BB black  
(note: product code for rope on spool L0251\*)



Stitched eye termination on request.

Ultrasonic ending.

### KEY FEATURES

- stitched eye termination on request
- 3 color variants

## STANDARDS

CE 1019  
EN 1891

## FEATURES



11 mm



34.5 kN




80 g/m




3 YEARS warranty

## MATERIALS



● 100 % PAD

## TECHNICAL DATA

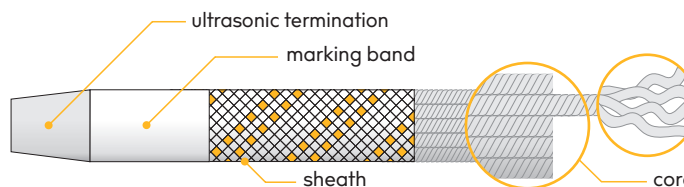

strength	= 34.5 kN
knot breaking force	= 22 kN
stitched eye breaking force	= 28.1 kN

