

# DCbright Snapper

## Spotlighting 7K-22K lm



The Snapper is DCbright's most versatile fixture. The compact size and modular design allows for light-weight, multi-fixture assemblies for high output lighting. Using standard 50mm-spaced optics this fixture can be configured to provide hundreds of specialized optical distributions. High temperature and stainless-steel versions available.


- **High Performance LEDs**
  - Dual-color available
  - Wide variety of CCTs
- **Available high temperature version, up to 120°C / 248°F**
- **High thermally conductive housings**
  - Corrosion-resistant aluminum
  - Available in stainless steel
- **Electrical, mechanical and thermal protections, including:**
  - Vibration resistance
  - Internal temperature monitor
  - Overcurrent regulation
- **Dust & Weatherproof, IP67/IP69K**
- **Impact resistant, IK08**
- **AC and DC versions available**



### Snapper Common Specifications SS=Stainless Steel, HT=High Temperature

<b>Size</b>
312 mm x 181 mm x 118 mm 12.2 in x 7.1 in x 4.6 in
<b>Weight</b>
Standard Aluminum / HT: 3.1 kg / 6.8 lb
Stainless Steel: 7 kg / 15.4 lb
<b>Operating Temperature</b>
Standard / SS: -40°C / -40°F < 50°C / 122°F
HT: -45°C / -49°F < 120°C / 248°F

<b>Cable / Remote Driver</b>
Standard / SS: 2m PUR HT: 2m Silicone
<b>Ingress / Impact Protection</b>
IP67 IK08, SS: IP69K, IK08
<b>Fixture Adjustment</b>
±240°, 30° steps
<b>Lumen Maintenance</b>
Standard / SS: 196,000 hr, LM80
HT: 60,500 hr, LM80

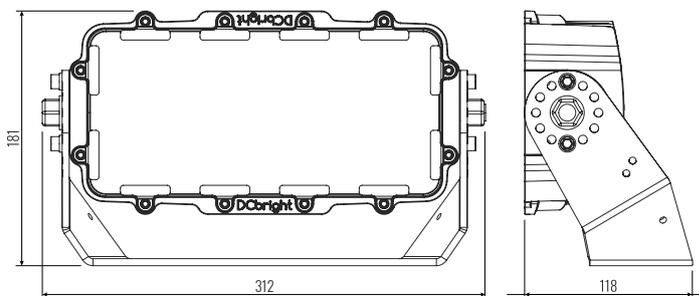

### Snapper Light and Power Specifications SS=Stainless Steel, HT=High Temperature, SIDE = Side Mount

Model	Lumens (6500K CCT)	Lm/W (100%)	Power (Watts)	Voltage	Optics	CCT	Limited Warranty	Control
SN-32-35AC-HT	7,000	200	35	90-305 Vac	120°	2700K - 6500K	3 year	Std: 0-10; Option: DALI
2x SN-32-35AC-HT	2 x 7,000	200	2 x 35	90-305 Vac	120°	2700K - 6500K	3 year	Std: 0-10; Option: DALI
SN-32-35AC-HT-SS	7,000	200	35	90-305 Vac	120°	2700K - 6500K	3 year	Std: 0-10; Option: DALI
SN-32-35AC-HT-SS-CHEM	7,000	200	35	90-305 Vac	120°	2700K - 6500K	3 year	Std: 0-10; Option: DALI
SN-32-150DC-24V	22,000	147	150	24 Vdc	100s of options	1700K - 6500K	3 year	
SN-32-150DC-24V-SIDE	22,000	147	150	24 Vdc	100s of options	1700K - 6500K	3 year	
SN-32-150AC	22,000	147	150	90-305 Vac	100s of options	1700K - 6500K	3 year	
SN-32-150AC-SS <sup>1</sup>	22,000	147	150	90-305 Vac	100s of options	1700K - 6500K	3 year	
SN-32-150DC-24V-SS <sup>1</sup>	22,000	147	150	24 Vdc	100s of options	1700K - 6500K	3 year	

<sup>1</sup> Dual color available